

Universal Sound Set

ACTIVE SPEAKER SYSTEM

Features:

- **Composing:** One U12B subwoofer, two U6 full range speaker and one U12Ba-2.1b amplifier mould sound reinforcement system
- Low woofer power:** 500W/4 Ω
- Full range two channel(100W/8Ω), with low pass. It can be used with mixer to combine a system
- Max SPL:** 121dB
- Standard accessories:** Speaker stand, mixer and connecting cable
2pcs U6\1pcs U12Ba\2pcs speaker Stands\one connecting cable

U6


- 2 way full range speaker, one 6.5" woofer
- One compression driver with diameter 25mm silk diaphragm
- Structure plastic cabinet, waterproof and sunscreening
- Fit for conference room, small hall, airport, station, hotel, outdoor and indoor avenues
- 6 mounting holes
- Used with U12Ba to come into being a completed sound reinforcement system.
- Can be used as assistant speaker

U12Ba-2.1b

- 3 channel post active speaker amplifier system
- One 12" woofer
- 2 way signal input, connected with 2 way amplifier input
- Voltage can be switchable between 110V -220V



Cabinet Dimension:

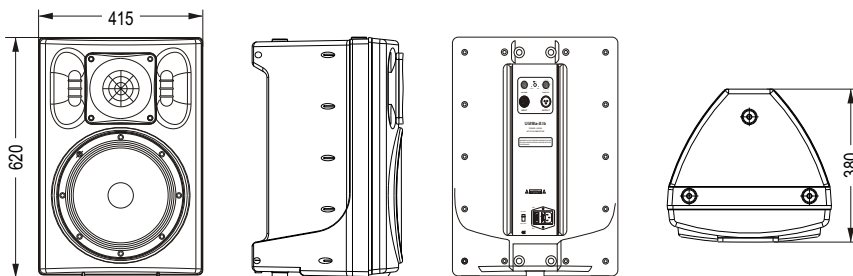

Specifications:

	U12Ba-2.1b	U6
Driver quantity:	Passive Low Frequency Speaker	2-way full range speaker
Cabinet Configuration:	High intensity material	High intensity material
Transducers:	Bass:12LP075-W×1	Bass:06LB050-U Treb:25ED25-8
Frequency Response(-3dB / -10dB):	45Hz~800Hz / 40Hz~ 2KHz	80Hz~18KHz / 65Hz~ 20KHz
Rated Power(RMS / PEAK):	300W /600W	80W /160W
Sensitivity(1W/1M):	94dB	91dB
SPL Rated Input(1M):	119dB(Free Field)	110dB(Free Field)
Rated Impedance:	4 Ω	8 Ω
Pink Noise Dispersion(H×V):		90° X60°
Connectors:	NL4/+1,-1×2	NL4/+1,-1×2
Dimensions(W×D×H):	415×380×620mm	225×215×330mm
System packaging:	715×402×960mm	Convenient speaker bag for the system unit, easy to move
Net Weight:	36.5Kg	
Gross Weight(1Set/pack):	39.5Kg	